

Senseca Germany GmbH
Tenter Weg 2-8 | 42897 Remscheid | GERMANY
Phone +49 2191 9672-0 | Fax +49 2191 9672-40
www.senseca.com | info@senseca.com | WEEE Reg. No. DE 93889386



Product information

OMNIPLUS-VHZ

Flow transmitter Gear wheel meter OMNIPLUS-VHZ



- Measures and monitors viscous media (oil)
- Measurement ranges 0.02...150 l/min
- High accuracy
- Low viscosity dependence
- Can be used up to 40,000 mm²/s (cSt)
- Nominal diameter DN8...DN25
- Analog output and two limit switches

Characteristics

The flow transmitters of the OMNIPLUS-VHZ series are suitable for liquid, viscous, lubricating media (e.g. lubricating oil). The measurement is carried out volumetrically by two interlocking gears, which rotate in opposite directions driven by the flowing medium. Due to the volumetric measuring method, the devices work almost viscosity-independent.

A sensor located outside the flow chamber detects the tooth flanks and generates a flow-proportional frequency signal. A pulse thus corresponds to a certain measuring volume. There are no magnets in the flow chamber. The devices can be operated bi-directionally. The flow direction is detected by the electronics and shown in the display (not at nominal diameter DN8!). The integrated totals counter works adding or subtracting depending on the flow direction. The integrated electronics have an LCD display as well as an analog output and two switching outputs and are easily configurable by the user.

The bodies of the devices are made of aluminum or stainless steel.

In addition to the version presented here, other versions are available:


LABO-VHZ without display, adjustable analog output
VHZ direct frequency output, not adjustable

Specifications

Measuring principle	Gear wheel meter (volumetric)
Nominal size	DN8...DN25
Connection type	Female thread G 1/4...G 1
Ranges	see table
Measurement uncertainty	±3 % of reading at 20 mm²/s in the specified measuring range
Compressive strength	see table

Media	Oil or other non-aggressive, lubricating fluids
Particle size	max. 20 µm (VHZ-008) max. 30 µm (VHZ(O)-010 / 020 / 025)
Media temperature	-10...+80 °C
Ambient temp.	-10...+70 °C
Storage temperature	-30...+80 °C
Materials wetted with media	Housing: Aluminium or stainless steel 1.4404 Gear wheels: Stainless st. 1.4462 Bearing: Iglidur X (OMNIPLUS-VHZ-008GK: stainless st. 1.4037 / 1.4016 / PVD coated) Gaskets: FKM Sight window: Glass (VHZO-020GA only)
Supply voltage	18...30 V DC
Current consumption	< 130 mA (SIO mode, unloaded outputs)
IO-Link specification	IO-Link revision: V1.1 Bit rate: COM2 (38400 bit/s) Minimum cycle time: 20 ms SIO mode: yes Port class: A compatible Block parameterization: yes Data storage: yes
Analog output	Current: 4...20 mA 0...20 mA Voltage: 0...10 V 2...10 V 0...5 V 1...5 V 0.5...4.5 V
Switching outputs	2 transistor outputs push-pull, parameterizable as NPN o.C. Short-circuit and reverse polarity resistant I _{out} = 100 mA max per output Configurable on the device as: • Limit switch • Frequency output • Pulse output • Signal output for preset counter
Display	1.2" graphic LCD (transflective) 128 x 64 pixels backlight white, red on alarm message
Electr. connection	M12x1 circular connector, 5-pin
Protection class	IP65 / IP67
Conformity	CE

Connection diagram

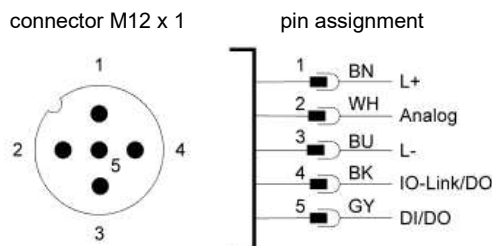

Product information


OMNIPLUS-VHZ

Ranges, compressive strengths and weights

OMNIPLUS-		Nominal size	Ranges Q_{nom} l/min	Start-up l/min	Resolution		Compressive strength	Weight kg	Housing material
					Volume/Pulse cm^3	Pulses/Liter			
...VHZ-008GA	●	DN 8	0.02... 2	0.004	0.04	25000	PN240	0.70	aluminium
...VHZ-008GK	○						PN190	1.45	stainless steel
...VHZ-010GA	●	DN 10	0.10... 6	0.01	0.20	5000	PN200	0.65	aluminium
...VHZ-010GK	○						PN200	1.30	stainless steel
...VHZ-020GA	●	DN 20	0.50... 50	0.04	2.00	500	PN200	1.73	aluminium
...VHZO-020GA	○						PN100	1.73	aluminium
...VHZ-025GA	●	DN 25	3.00...150	0.1	5.222	191.5	PN100	6.30	aluminium

● = standard ○ = option

Dimensions

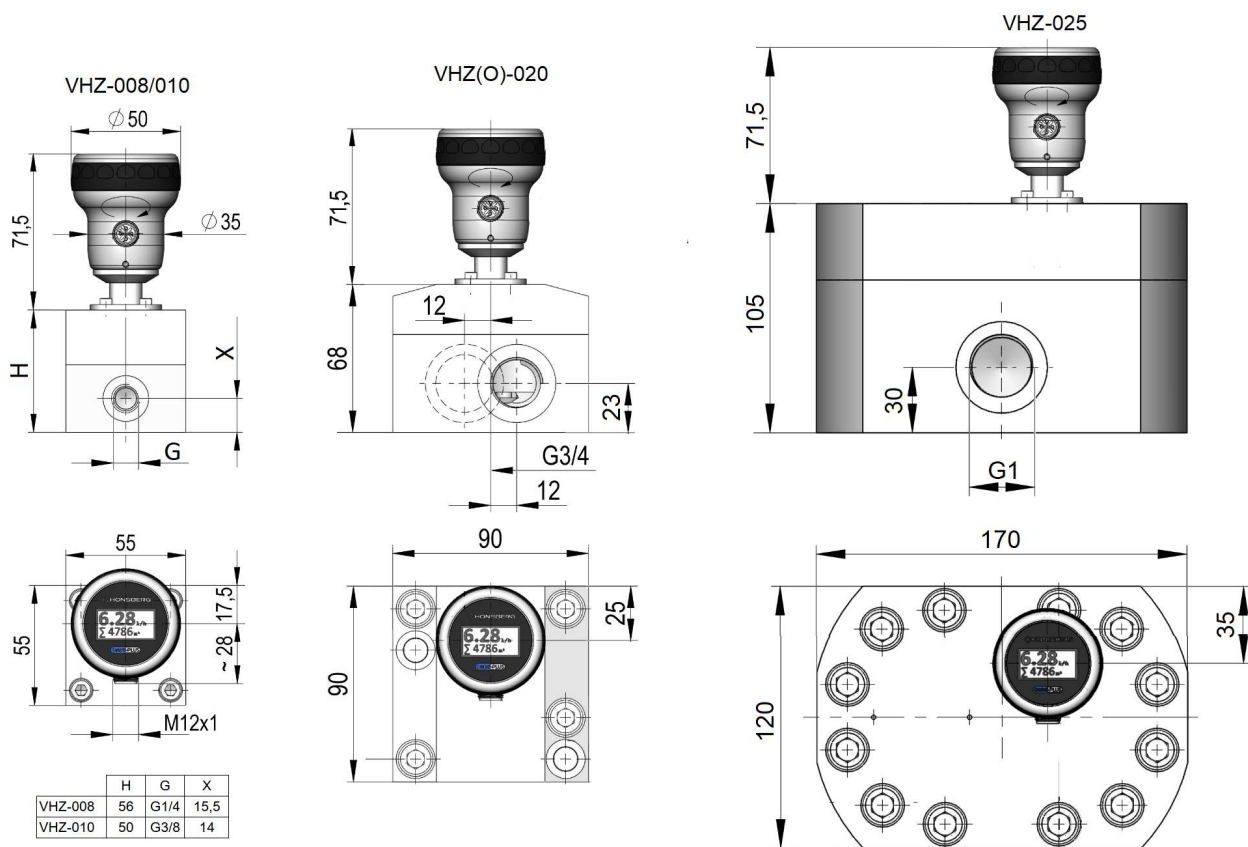

Order codes

Designation		Nominal size	Housing material	Q_{max}
OMNIPLUS-VHZ-008GA004	●	DN8	aluminium	2 l/min
OMNIPLUS-VHZ-008GK004	○	DN8	stainless steel	2 l/min
OMNIPLUS-VHZ-010GA010	●	DN10	aluminium	6 l/min
OMNIPLUS-VHZ-010GK010	○	DN10	stainless steel	6 l/min
OMNIPLUS-VHZ-020GA065	●	DN20	aluminium	50 l/min
OMNIPLUS-VHZO-020GA065	○	DN20	aluminium (with sight glass)	50 l/min
OMNIPLUS-VHZ-025GA150	●	DN25	aluminium	150 l/min

● = standard ○ = option

Accessories

Cable with circular connector M12x1 (not included)